


# DEADLINE ANCHOR

Standard deadline anchors of different sizes and capacities as left-hand and right-hand design. Custom-made deadline anchors are also available.

## AVAILABLE CAPACITIES:

60 000–100 000 pounds deadline pull

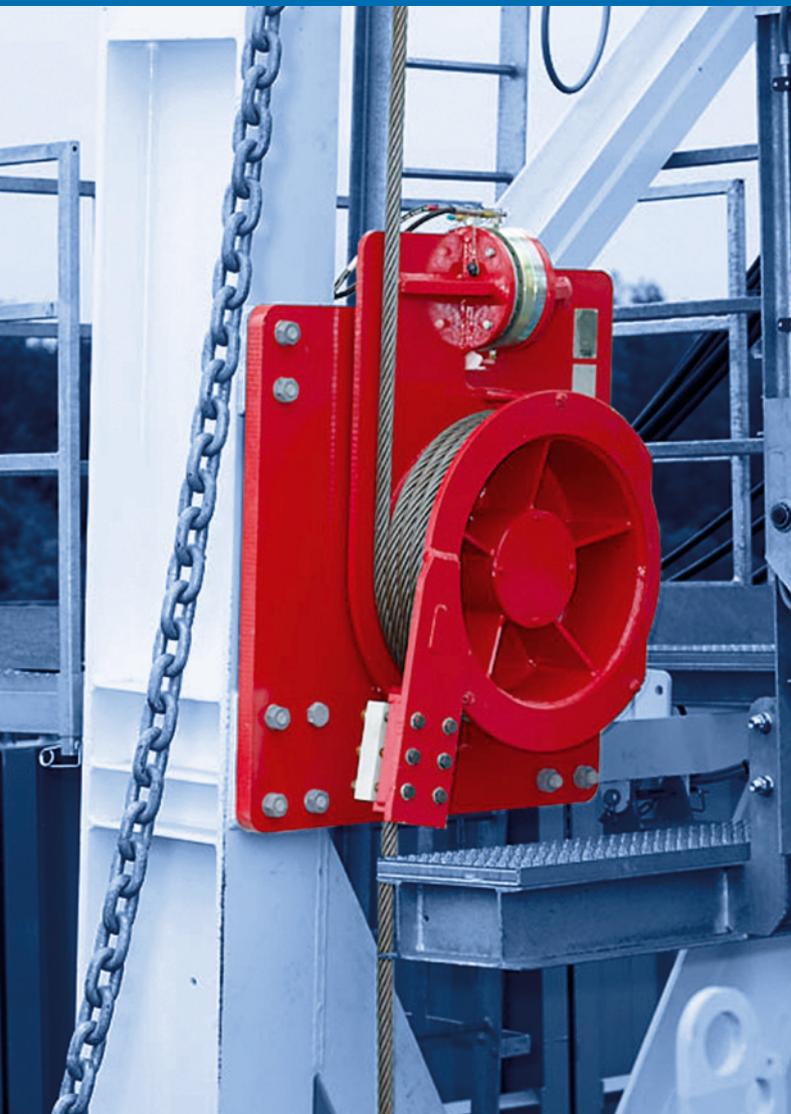

## UNIQUE FEATURES

- Heavy-duty, high-grade structural steel
- Tapered roller anti-friction bearings
- Bronze wireline clamp
- Machined grooved drum
- Left-hand models available
- Deadline anchor manufactured according to API 8C
- CE conformity
- ATEX conformity on request

# TECHNICAL DATA

## DEADLINE ANCHOR

Designed to be used with compression load cells, the Bentec DEADLINE ANCHORS are made from high-grade structural steel for operation in harsh work environments from -40°C up to +55°C.

The Bentec DEADLINE ANCHORS are designed, fabricated and tested in Bentec's own yard with its high-quality manufacturing standard and in accordance with API 8C.

### TECHNICAL DATA

Model	Line Pull lbf (kN)	Load Sensor	Wireline Size in (mm)	Dimensions (h x w x l) in (mm)	Drum Dia. in (mm)	Weight lb (kg)	Mounting
DA-100-W-1 1/2	100 000 (445)	Compression E 551	1 1/2 (38)	46 x 20 x 55 (1 160 x 506 x 1 400)	28 (711)	2 315 (1 050)	Wall
DA-100-W-1 3/8	100 000 (445)	Compression E 551	1 3/8 (35)	46 x 19 x 55 (1 160 x 490 x 1 400)	28 (711)	2 293 (1 040)	Wall
DA-100-W-1 1/4	100 000 (445)	Compression E 551	1 1/4 (32)	46 x 19 x 55 (1 160 x 478 x 1 400)	28 (711)	2 293 (1 040)	Wall
DA-60-W-1 1/4	60 000 (267)	Compression E 551	1 1/4 (32)	37 x 17 x 43 (950 x 420 x 1 100)	24 (610)	1 598 (725)	Wall
DA-60-W-1 1/8	60 000 (267)	Compression E 551	1 1/8 (28)	37 x 16 x 43 (950 x 408 x 1 100)	24 (610)	1 598 (725)	Wall

Other models and sizes are available on request.